


# Press Pad P6200S Stable Series

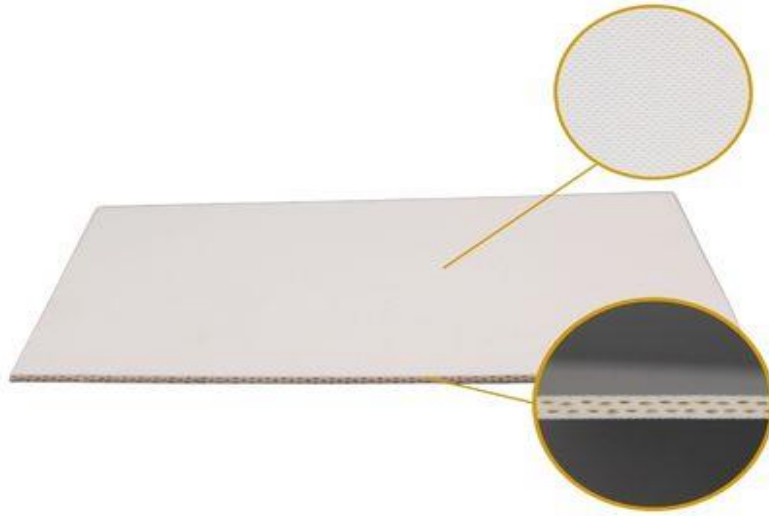

## Material

5-layer press pad with a structured top and bottom surface:

- Top layer: silicone rubber
- Middle layer: double layer of glass fibre and silicone rubber in between
- Bottom layer: silicone rubber

## Available thickness

- Approx. 1.9 mm (article: [P6219S](#))
- Approx. 2.3 mm (article: [P6223S](#))
- Approx. 2.7 mm (article: [P6227S](#))

## Operating temperature

260°C (depending on application)

## Properties

Rebound/ Elasticity cushioning:	Up to 99%
Pressure	To use between 0 – 50 kg/cm <sup>2</sup>

## Usable for

PVC, PC, ABS, PET, PET-G

### Special Information:

We recommend to run one test cycle before the standard lamination starts.