


Press Pad P6200 Series

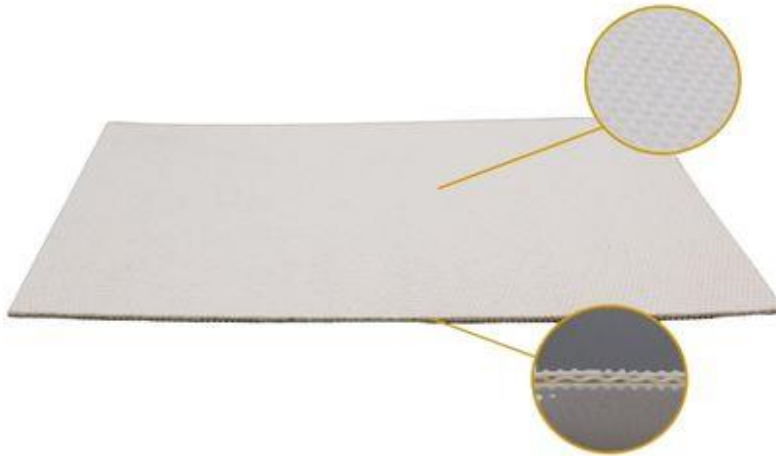

Material

3-layer press pad with a structured top and bottom surface:

- Top layer: silicone rubber
- Middle layer: glass fibre
- Bottom layer: silicone rubber

Available thickness

- Approx. 1.9 mm (article: [P6219](#))
- Approx. 2.3 mm (article: [P6223](#))
- Approx. 2.7 mm (article: [P6227](#))
- Approx. 3.3 mm (article: [P6233](#))

Operating temperature

260°C (depending on application)

Properties

Rebound/ Elasticity cushioning:	Up to 99%
Pressure	To use between 0 – 50 kg/cm ²

Usable for

PVC, PC, ABS, PET, PET-G

Special Information:

We recommend to run one test cycle before the standard lamination starts.