


Press Pad RAPID

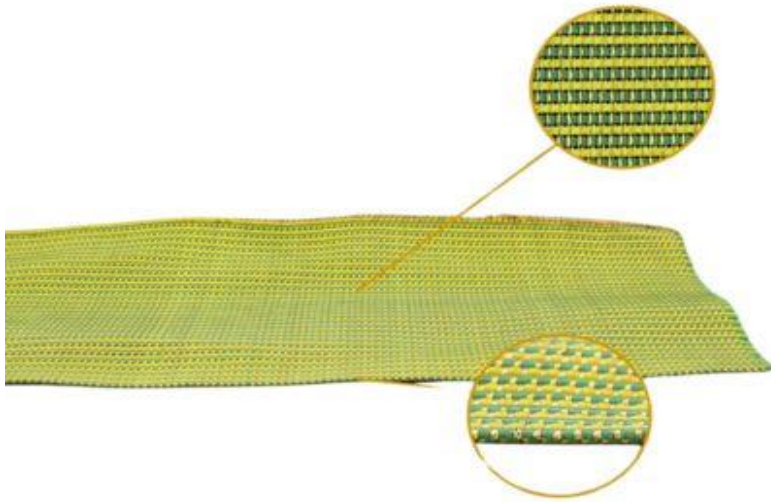

Material	
<ul style="list-style-type: none"> • Silicone elastomers with brass wire warp threads • Surface: Top and bottom structured 	

Available thickness	
<ul style="list-style-type: none"> • Approx. 2.1 mm 	

Operating temperature	
260°C (depending on application)	

Properties	
Weight:	3600 g/m ² ± 10%
Rebound/ Elasticity cushioning:	Up to 99%
Pressure	To use between 0 – 60 kg/cm ²

Usable for	
PCB, PVC, PC, ABS, PET, PET-G	

Special Information:

We recommend to run one test cycle before the standard lamination starts.